

Quad

Ezi-W@tch


Technical Specifications Part #: DMEZI-Q	
Refresh Rate	NTSC: 60 frames/sec, PAL 50 frames/sec
Resolution (HXV)	NTSC: 860x525, PAL 860x625
Power Source	DC 9v~12v
Power Consumption	6w(max), 410 mA@12v
Title Generator	Up to 8 characters each channel
Video Freeze Duration	From 1 sec to 99 sec
Video Output Format	Full/Quad/Freeze/Auto Switch Programmable
Video Output Signal	1Vp-p/75 Ohms CVBS out
Video Output Port	RCaX1 Monitor out, RCaX1 VCR Record out
Video Input Port	x4 cameras + 1 VCR record out
Weight	14.5 oz (411g)
Warranty	1 Year

Monitor not included in price of quad,
pictured to show capabilities



- Fully compatible with all Ezi-Watch and Ezi-Com components.
- Independent title setting, up to 8 characters, for every channel.
- Automatically keeps the last image when video loss occurs.
- Automatically detects unconnected channel, and skips that channel in auto-switch mode.
- Single channel audio enabled.
- Freeze individual camera function.
- Video signal loss detection produces sound by built-in buzzer.
- Independent bright, contrast, color and sharpness adjustments for every channel..
- Provides VCR-IN to support 2x2 zoom-in and freeze function for playback.
- Smart auto switcher, random sequence and dwell time are supported.
- Full quad display at real time refresh rate (60 frames/sec).
- No borders for full quad display.
- Built in timer and title generator.
- Audio available on one channel.

Quad Front Control Panel

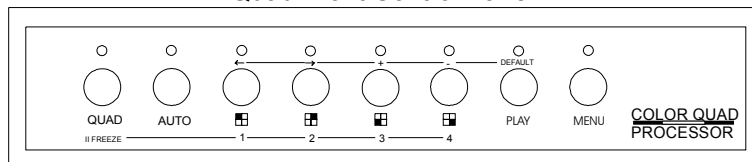

		MODE				
		Normal	Auto	Freeze	Playback	Menu Setup
		"quad" or Chx LED on only	"auto" LED on	"quad" LED flash	"play" LED on	"Menu" LED on
KEY	QUAD	Quad display/ → freeze mode	→ normal mode & quad display	→ normal mode & quad display	VCR display	
	AUTO	→ Auto Mode				Change Character color
	1	Ch 1 full display	→ normal mode & Ch 1 image	Freeze/Release Ch 1 image	Freeze/Rel. 2x2 Ch 1 image	Move cursor left ◀
	2	Ch 2 full display	→ normal mode & Ch 2 image	Freeze/Release Ch 2 image	Freeze/Rel. 2x2 Ch 2 image	Move cursor right ▶
	3	Ch 3 full display	→ normal mode & Ch 3 image	Freeze/Release Ch 3 image	Freeze/Rel. 2x2 Ch 3 image	Increase Value +
	4	Ch 4 full display	→ normal mode & Ch 4 image	Freeze/Release Ch 4 image	Freeze/Rel. 2x2 Ch 4 image	Decrease Value -
	PLAY	→ playback mode	→ playback mode		→ normal mode & quad display	
MENU	→ menu mode	→ menu mode			Next page/→ normal mode	